

FFWD RYOT⁵⁵ SPECSHEET

DT350 2:1

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	DT Swiss 350 (2:1)
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	No
Axle Dimensions***	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Steel
Bearing Usage	Front: 2x 6902-2RS Rear DS: 1x 6902-2RS Rear NDS: 1x 6902-2RS Freehub: 2x 6902-2RS


ULTIMATE SPEED WEAPON

Rimtype	Full Carbon Clincher
ETRTO	21 - 622
Rim Depth	55mm
Rim Internal Width	21mm
Rim External Width	31mm
Min. Valve Length	70mm
Min. Tyre Size	23mm
Max. Tyre Size	42mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front 780 gram Rear 910 gram Set 1690 gram
Aeroshape	Yes, LAW TECH
Rimtape	Tubeless tape; 27mm

LAW TECH AERO PROFILE

Spoke type	Front NDS	DT Aerolite
	Front DS	DT Aerolite
	Rear NDS	DT Aerocomp
	Rear DS	DT Aerocomp
Spoke style	Straightpull	
	Nipple type	
		DT Pro Lock Brass 15mm
Spoke Count	Front 24 / Rear 24	
	Spoke length (front)	NDS
DS		262mm (8x)
Spoke length (rear)	NDS	262mm (8x)
	DS	266mm (16x)
Spoke Pattern	Front NDS	3 Cross
	Front DS	1 Cross
	Rear NDS	1 Cross
	Rear DS	3 Cross
Spoke Tension	Front NDS	1100N
	Rear DS	1100N
Color Options	MBL/GRY	

TUBELESS READY

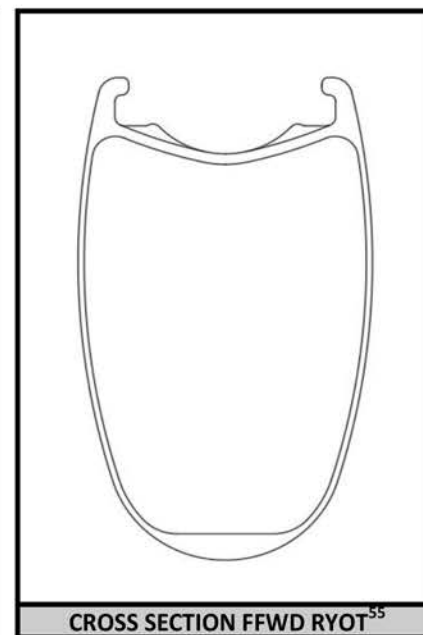

What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions
- High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)

*** Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)