

FFWD RYOT⁵⁵ TEAM SPECSHEET

DT240 EXP 2:1

Disc Brake Compatible	Yes								
Rim Brake Compatible	No								
Innertube Compatible	No								
Tubeless Compatible	No								
Tubular Compatible	Yes								
Hub Type	DT Swiss 240 EXP (2:1)								
Campa Option	Yes								
Shimano Option	Yes								
XDR Option	Yes								
Microspline Option	No								
Axle Dimensions***	Front 12x100 / Rear 12x142								
Disc Rotor Interface	Centerlock								
Bearing Type	Cartridge; Stainless steel								
Bearing Usage	<table border="0"> <tr> <td>Front</td> <td>2x 26157-2RS</td> </tr> <tr> <td>Rear DS</td> <td>1x 26157-2RS</td> </tr> <tr> <td>Rear NDS</td> <td>1x 26157-2RS</td> </tr> <tr> <td>Freehub</td> <td>2x 6802-2RS</td> </tr> </table>	Front	2x 26157-2RS	Rear DS	1x 26157-2RS	Rear NDS	1x 26157-2RS	Freehub	2x 6802-2RS
Front	2x 26157-2RS								
Rear DS	1x 26157-2RS								
Rear NDS	1x 26157-2RS								
Freehub	2x 6802-2RS								


ULTIMATE SPEED WEAPON

Rimtype	Full Carbon Tubular						
ETRTO	700c						
Rim Depth	55mm						
Rim Internal Width	n.a.						
Rim External Width	25mm						
Min. Valve Length	70mm						
Min. Tyre Size	25mm						
Max. Tyre Size	42mm						
Max. Tyre Pressure*	8,3Bar / 120PSI						
Max. Rider Weight	120kg / 265lbs						
Weight**	<table border="0"> <tr> <td>Front</td> <td>685 gram</td> </tr> <tr> <td>Rear</td> <td>795 gram</td> </tr> <tr> <td>Set</td> <td>1470 gram</td> </tr> </table>	Front	685 gram	Rear	795 gram	Set	1470 gram
Front	685 gram						
Rear	795 gram						
Set	1470 gram						
Aeroshape	Yes, TEAM TECH						
Rimtape	n.a.						

TEAM TECH

Spoke type	<table border="0"> <tr> <td>Front NDS</td> <td>DT Aerolite</td> </tr> <tr> <td>Front DS</td> <td>DT Aerolite</td> </tr> <tr> <td>Rear NDS</td> <td>DT Aerocomp</td> </tr> <tr> <td>Rear DS</td> <td>DT Aerocomp</td> </tr> </table>	Front NDS	DT Aerolite	Front DS	DT Aerolite	Rear NDS	DT Aerocomp	Rear DS	DT Aerocomp
Front NDS	DT Aerolite								
Front DS	DT Aerolite								
Rear NDS	DT Aerocomp								
Rear DS	DT Aerocomp								
Spoke style	Straightpull								
Nipple type	DT Pro Lock Brass 15mm								
Spoke Count	Front 24 / Rear 24								
Spoke length (front)	<table border="0"> <tr> <td>NDS</td> <td>266mm (16x)</td> </tr> <tr> <td>DS</td> <td>264mm (8x)</td> </tr> </table>	NDS	266mm (16x)	DS	264mm (8x)				
NDS	266mm (16x)								
DS	264mm (8x)								
Spoke length (rear)	<table border="0"> <tr> <td>NDS</td> <td>266mm (8x)</td> </tr> <tr> <td>DS</td> <td>264mm (16x)</td> </tr> </table>	NDS	266mm (8x)	DS	264mm (16x)				
NDS	266mm (8x)								
DS	264mm (16x)								
Spoke Pattern	<table border="0"> <tr> <td>Front NDS</td> <td>3 Cross</td> </tr> <tr> <td>Front DS</td> <td>1 Cross</td> </tr> <tr> <td>Rear NDS</td> <td>1 Cross</td> </tr> <tr> <td>Rear DS</td> <td>3 Cross</td> </tr> </table>	Front NDS	3 Cross	Front DS	1 Cross	Rear NDS	1 Cross	Rear DS	3 Cross
Front NDS	3 Cross								
Front DS	1 Cross								
Rear NDS	1 Cross								
Rear DS	3 Cross								
Spoke Tension	<table border="0"> <tr> <td>Front NDS</td> <td>1100N</td> </tr> <tr> <td>Rear DS</td> <td>1100N</td> </tr> </table>	Front NDS	1100N	Rear DS	1100N				
Front NDS	1100N								
Rear DS	1100N								
Color Options	MBL/WHT								

WIDE TUBULAR RIM

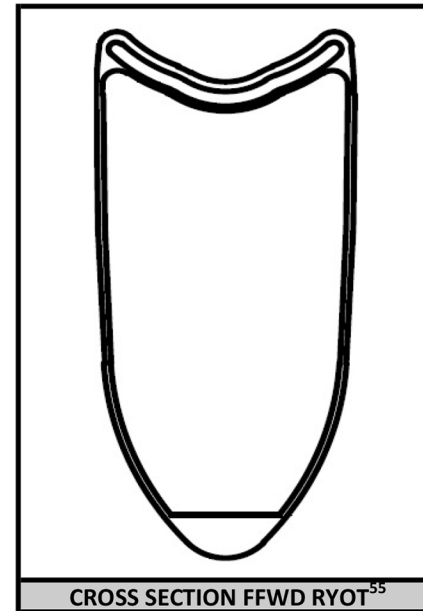

What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions
- High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)

*** Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)