

## FFWD RYOT33 SPECSHEET

### FFWD TWO/ONE RATCHET

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	FFWD TWO/ONE
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	No
Axle Dimensions***	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Steel
Bearing Usage	Front: 2x 6902-2RS Rear DS: 1x 6903-2RS Rear NDS: 1x 6902-2RS Freehub: 2x 6902-2RS


### LIGHTWEIGHT VERSATILITY

Rimtype	Full Carbon Clincher
ETRTO	21 - 622
Rim Depth	33mm
Rim Internal Width	21mm
Rim External Width	30mm
Min. Valve Lenght	50mm
Min. Tyre Size	23mm
Max. Tyre Size	42mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front 700 gram Rear 860 gram Set 1560 gram
Aeroshape	Yes, LAW TECH
Rimtape	Tubeless tape; 27mm

### LAW TECH AERO PROFILE

Spoke type	Front NDS DT Aerolite Front DS DT Aerolite Rear NDS DT Aerocomp Rear DS DT Aerocomp
Spoke style	Straightpull
Nipple type	DT Pro Lock Brass 15mm
Spoke Count	Front 24 / Rear 24
Spoke lenght (front)	NDS 288mm (16x) DS 284mm (8x)
Spoke lenght (rear)	NDS 284mm (8x) DS 288mm (16x)
Spoke Pattern	Front NDS 3 Cross Front DS 1 Cross  Rear NDS 1 Cross Rear DS 3 Cross
Spoke Tension	Front NDS 1100N Rear DS 1100N
Color Options	MBL/GRY

### TUBELESS READY

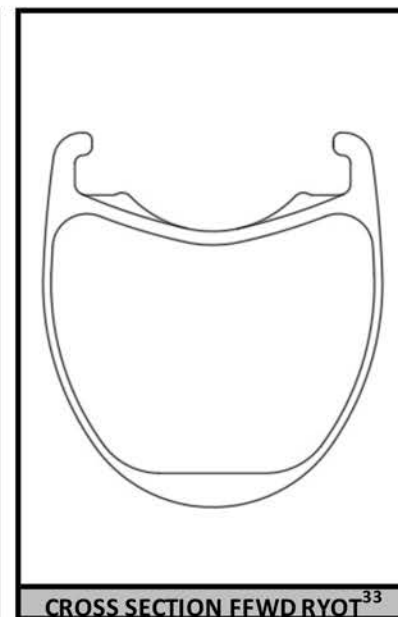

#### What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions
- High quality padded wheelbag

\* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

\*\* Weights may differ +/- 5% (due to handbuilding process of rims)

\*\*\* Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)