


FFWD OUTRIDE SPECSHEET

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	FFWD Ratchet Hub Disc
XDR Option	Yes; S0030057000001
Campa Option	Yes; S0030057000002
Shimano Option	Yes; S0030057000003
Microspline Option	No
Axle Dimensions***	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Steel
Bearing Usage	Front: 2x 6902-2RS Rear DS: 1x 17287-2RS Rear NDS: 1x 15267-2RS Freehub: 2x 15267-2RS

Rimtype	Full Alloy Clincher
ETRTO	19 - 622
Rim Depth	30mm
Rim Internal Width	20mm
Rim External Width	24mm
Min. Valve Length	50mm
Min. Tyre Size	23mm
Max. Tyre Size	40mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front: 780 gram Rear: 950 gram Set: 1730 gram
Aeroshape	No
Rimtape	Tubeless tape; 25mm

Spoke type	Front NDS: DT Competition Front DS: DT Competition Rear NDS: DT Competition Rear DS: DT Competition
Spoke style	Straightpull
Nipple type	DT Pro Lock Brass 15mm
Spoke Count	Front 24 / Rear 24
Spoke length (front)	NDS: DS:
Spoke length (rear)	NDS: DS:
Spoke Tension	Front NDS: 1100N Rear DS: 1100N
Spoke Patern	Front NDS: 2 Cross Front DS: 2 Cross Rear NDS: 2 Cross Rear DS: 2 Cross
Color Options	MBL/GRY

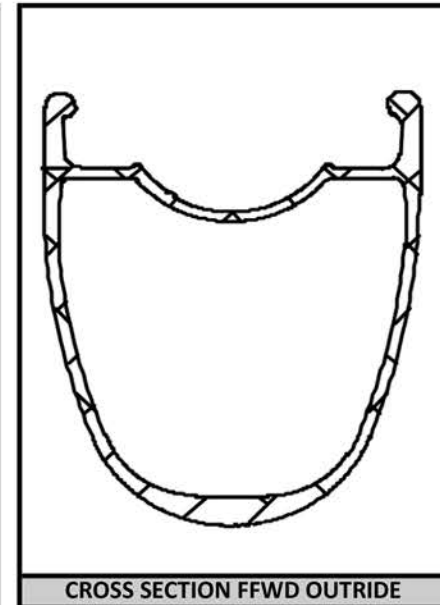

What's in the box:
→ Wheelset
→ Pre-installed tubeless tape
→ Pair of alloy tubeless valves
→ Tubeless installation instructions

* Max. tires pressure is based on structural integrity the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5%

*** Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)