

FFWD TYRO DB SPEC SHEET

TUBELESS READY

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	FFWD RATCHET DISC BRAKE
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	No
Axle Dimensions***	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; Steel
Bearing Usage	Front 2x 6902-2RS Rear DS 1x 17287-2RS Rear NDS 1x 15267-2RS Freehub 2x 6902-2RS


GRAVEL COMPATIBLE

Rimtype	Full Carbon Clincher
ETRTO	21 - 622
Rim Depth	45mm
Rim Internal Width	21mm
Rim External Width	29mm
Min. Valve Length	60mm
Min. Tyre Size	23mm
Max. Tyre Size	44mm
Max. Tyre Pressure*	8,3Bar / 120PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front 730 gram Rear 945 gram Set 1675 gram
Aeroshape	Yes
Rimtape	Tubeless tape; 27mm

WIDE RIM DESIGN

Spoke type	Front NDS	Sapim Sprint
	Front DS	Sapim Sprint
	Rear NDS	Sapim Sprint
	Rear DS	Sapim Sprint
Spoke style	Straightpull	
Nipple type	DT Pro Lock Brass 15mm	
Spoke Count	Front 24 / Rear 24	
Spoke length (front)	NDS	272mm (12x)
	DS	274mm (12x)
Spoke length (rear)	NDS	276mm (12x)
	DS	274mm (12x)
Spoke Pattern	Front NDS	Radial
	Front DS	Radial
	Rear NDS	2 Cross
	Rear DS	2 Cross
Spoke Tension	Front NDS	1100N
	Rear DS	1100N
Color Options	BLACK	

VALUE FOR MONEY

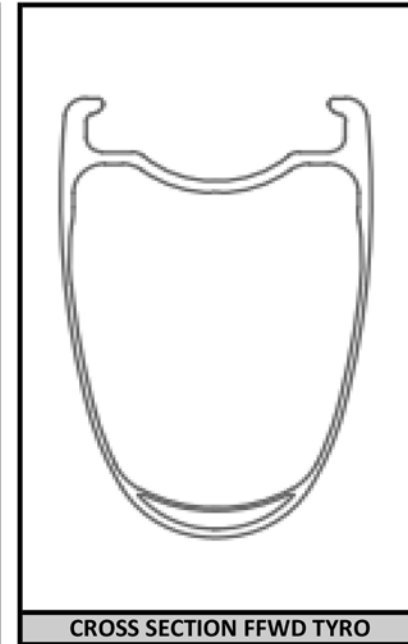

What's in the box:

- Wheelset
- Pre-installed tubeless tape
- Pair of alloy tubeless valves
- Tubeless installation instructions

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)

*** Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)