

FFWD RYOT77 SPEC SHEET

FFWD N/GAGE

Disc Brake Compatible	Yes
Rim Brake Compatible	No
Innertube Compatible	Yes
Tubeless Compatible	Yes
Tubular Compatible	No
Hub Type	FFWD N/GAGE (2:1)
Campa Option	Yes
Shimano Option	Yes
XDR Option	Yes
Microspline Option	Yes
Axle Dimensions	Front 12x100 / Rear 12x142
Disc Rotor Interface	Centerlock
Bearing Type	Cartridge; steel
Bearing Usage	Front 2x 26157-2RS Rear DS 1x 6902-2RS Rear NDS 1x 26157-2RS Freehub 2x 6802-2RS


ULTIMATE SPEED WEAPON

Rimtype	Full Carbon Clincher
ETRTO	23 - 622
Rim Depth	77mm
Rim Internal Width	23mm
Rim External Width	31mm
Min. Valve Length	90mm
Min. Tyre Size	25mm
Max. Tyre Size	42mm
Max. Tyre Pressure*	7,6Bar / 110PSI
Max. Rider Weight	120kg / 265lbs
Weight**	Front 850 gram Rear 990 gram Set 1840 gram
Aeroshape	Yes, LAW TECH
Rimtape	Tubeless tape; 27mm

LAW TECH AERO PROFILE

Spoke type	Front NDS Sapim CX Ray
	Front DS Sapim CX Ray
	Rear NDS Sapim CX Sprint
	Rear DS Sapim CX Sprint
Spoke style	Straightpull
	DT Pro Lock Brass 15mm
Spoke Count	Front 24 / Rear 24
Spoke length (front)	NDS 244mm (16x)
	DS 240mm (8x)
Spoke length (rear)	NDS 240mm (8x)
	DS 244mm (16x)
Spoke Patern	Front NDS 3 Cross
	Front DS 1 Cross
	Rear NDS 1 Cross
	Rear DS 3 Cross
Spoke Tension	Front NDS 1100N
	Rear DS 1100N
Color Options	BLACK

TUBELESS READY

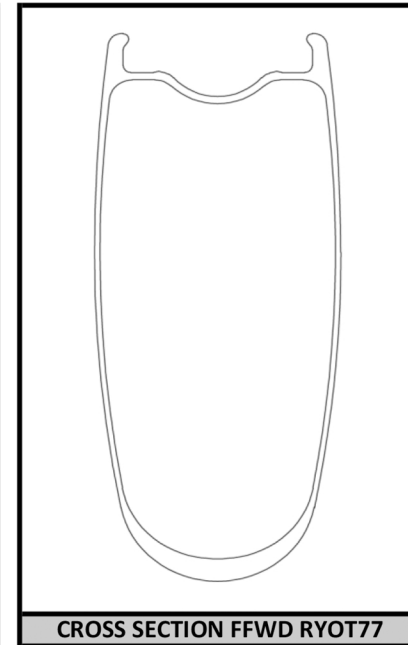

What's in the box:	
→	Wheelset
→	Pre-installed tubeless tape
→	Pair of alloy tubeless valves
→	Tubeless installation instructions
→	High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 3% (due to handbuilding process of rims)